


TACT SWITCH

Suntan®

TSS-TD-1529

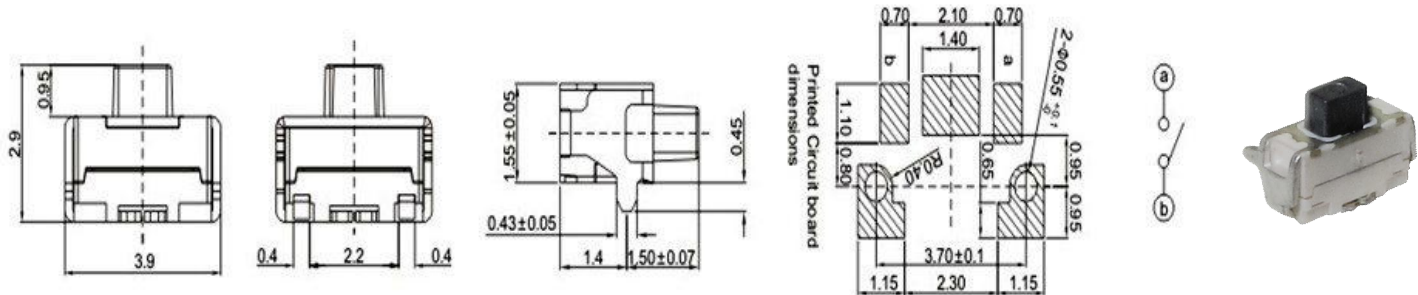

MODEL NO	H (mm)	Tape & Reel Option	CODE	OPERATING FORCE (gf)
TSS-TD-1529	2.9	Yes	F	230±30

SPECIFICATIONS

1. RATING: DC 12V / 50mA
2. TRAVEL: 0.15±0.05mm
3. CONTACT RESISTANCE: ≤50mΩ
4. LIFE: More than 100,000 times
5. INSULATION RESISTANCE: ≥100MΩ
6. VOLTAGE PROOF: 250V AC / 1min

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

Suntan® Technology Company Limited Website: www.suntan.com.hk Email: info@suntan.com.hk Tel: (852) 8202 8782 Fax: (852) 8208 6246