


MICA CAPACITOR

Suntan®


HIGH RELIABILITY AND STABILITY, COMPACT AND HIGH MOISTURE – RESISTANCE

TS23



S P E C I F I C A T I O N S

CAPACITANCE RANGE	1pF – 100,000pF
TOLERANCE	±0.5pF, ±1%, ±2%, ±5% ~ 20%
RATED VOLTAGE	DC 50V, 100V, 300V, 500V
OPERATING TEMPERATURE	150°C at full rated voltage

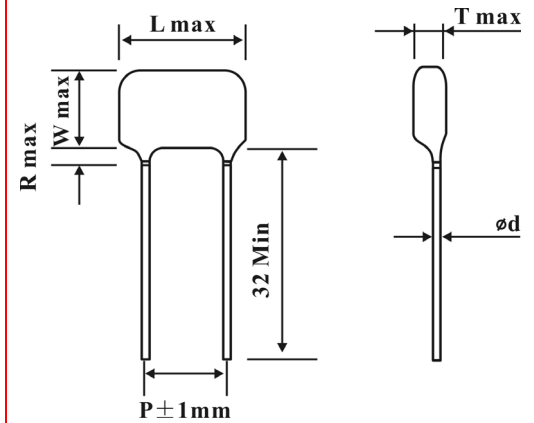

UNIT: mm

TYPE	RATED VDC	CAPACITANCE PF	L	W	T	R	P ±1mm	d ±0.06
DM5	50	39 ~ 400	7.5	7.5	5.5	3	3	0.4
	100	22 ~ 180						
	300	1 ~ 110						
DM10	100	39 ~ 470	10.5	10.5	6.5	3	3.5	0.64
	300	39 ~ 360						
	500	1 ~ 250						
DM15	100	820 ~ 1,200	13.5	11.5	7.0	3	6	0.8
	300	430 ~ 1,200						
	500	1 ~ 750						
DM19	100	6,200 ~ 8,200	18.5	15.5	10.0	3.5	9	1.0
	300	3,300 ~ 6,800						
	500	100 ~ 5,100						
DM20	100	6,200 ~ 12,000	21.5	16.5	12.0	3.5	11	1.0
	300	4,300 ~ 12,000						
	500	680 ~ 10,000						
DM30	50	11,000 ~ 20,000	21.5	24.0	12.0	4	11	1.0
	300	7,500 ~ 20,000						
	500	5,100 ~ 20,000						
DM42	50	27,000 ~ 100,000	38.5	25.5	13.0	4	27	1.0
	300	22,000 ~ 69,000						
	500	16,000 ~ 51,000						

Note: Specification are subject to change without notice. For more detail and update, please visit our website.