

METALLIZED POLYESTER FILM CAPACITOR – MINI BOX


Suntan®

NON – INDUCTIVE, PLASTIC CASE AND EPOXY RESIN

TS05


FEATURES

- High reliability
- Low dissipation factor.
- Box type provides the identical outer appearance

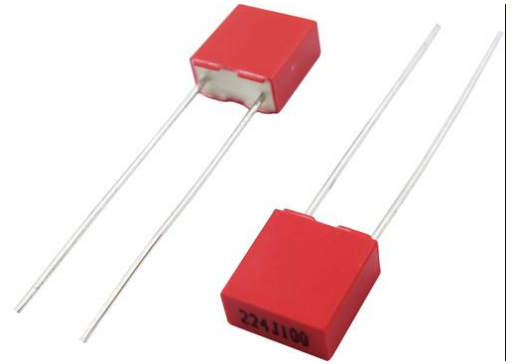

SPECIFICATIONS	
Reference Standard	GB7332 (IEC 60384-2)
Climatic Category	40/085/21
Rated Temperature	85°C
Rated Voltage	50/63/100V、250V、400V、630V.DC
Capacitance Range	0.0010 μ F ~ 2.2 μ F
Capacitance Tolerance	\pm 5%(J), \pm 10%(K)
Voltage Proof	Type A: 1.6U _R (5s) ; Type B: 1.4U _R (5s)
Dissipation Factor	\leq 0.8% (20°C, 1KHz)
Insulation Resistance	C \leq 0.33 μ F, IR \geq 3000M Ω ;
	C $>$ 0.33 μ F, IR*C \geq 1000M Ω *UF (20°C, 1min)

Outline Drawing Dimensions (mm)

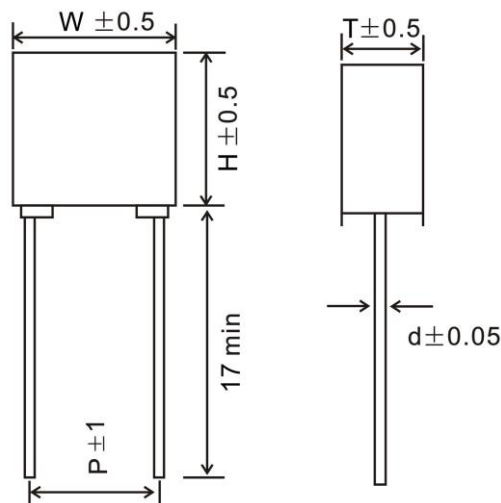

METALLIZED POLYESTER FILM CAPACITOR – MINI BOX

Suntan®

NON – INDUCTIVE, PLASTIC CASE AND EPOXY RESIN

TS05

Type A (P:5mm)

(μF)	63VDC			100VDC			250VDC			400VDC			630VDC		
	W	H	T	W	H	T	W	H	T	W	H	T	W	H	T
0.0010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5
0.0056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0062	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5
0.0082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	10.0	5.0
0.010	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0
0.022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0
0.039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	--	--	--
0.047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0	--	--	--
0.082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--
0.10	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--
0.12	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.15	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.18	7.2	7.5	3.5	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--	--	--	--
0.22	7.2	7.5	3.5	7.2	7.5	3.5	7.2	10.0	5.0	--	--	--	--	--	--
0.27	7.2	7.5	3.5	7.2	10.0	5.0	7.2	10.0	5.0	--	--	--	--	--	--
0.33	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.47	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.56	7.2	9.5	4.5	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
0.68	7.2	10.0	5.0	7.2	10.0	5.0	--	--	--	--	--	--	--	--	--
1.0	7.2	11.0	6.0	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--
1.5	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--	--	--	--
2.2	7.2	11.0	6.0	--	--	--	--	--	--	--	--	--	--	--	--

Type B (P:5mm)

(μF)	63VDC			100VDC			400VDC		
	W	H	T	W	H	T	W	H	T
0.068	--	--	--	--	--	--	7.2	9.5	4.5
0.082	--	--	--	--	--	--	7.2	9.5	4.5
0.12	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--
0.15	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--
0.18	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--
0.22	7.2	6.5	2.5	7.2	6.5	2.5	--	--	--
0.27	7.2	6.5	2.5	7.2	9.5	4.5	--	--	--
0.33	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.47	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.56	7.2	7.5	3.5	7.2	9.5	4.5	--	--	--
0.68	7.2	9.5	4.5	7.2	9.5	4.5	--	--	--
1.0	7.2	10.0	5.0	--	--	--	--	--	--

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.