

SS34L THRU SS36L

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 40 to 60 Volts Forward Current - 3.0 Ampere



FEATURES

- ◆ Low profile surface mount package
- ◆ Built-in strain relief
- ◆ High switching speed, low V_F
- ◆ Low voltage drop, high efficiency
- ◆ For use in low voltage high frequency inverters, Free willing, and polarity protection applications
- ◆ Guarding for over voltage protection

Mechanical Data

- ◆ Case: Transfer molded plastic
- ◆ Epoxy :UL 94V-0 rate flame retardant
- ◆ Lead: Solder plated, solderable per MIL-STD-750 method 2026
- ◆ Polarity: Color band denotes cathode end

DO-214AC (SMA)

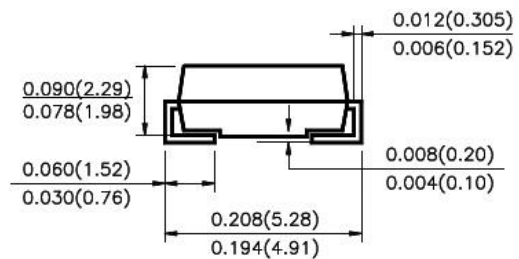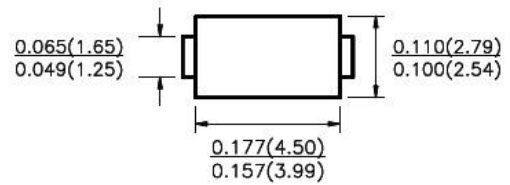

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOLS	SS34L	SS36L	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	60	VOLTS
Maximum RMS Voltage	V_{RMS}	28	42	VOLTS
Maximum DC Blocking Voltage	V_{DC}	40	60	VOLTS
Maximum Average Forward Rectified Current at $T_L = 75^\circ\text{C}$	$I_{(AV)}$	3		Amps
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	70		Amps
Maximum Instantaneous Forward Voltage @ 3.0A(Note 1)	V_F	0.45	0.65	Volts
Maximum DC Reverse Current at rated DC Blocking voltage per element	$T_A = 25^\circ\text{C}$	0.5		mA
	$T_A = 100^\circ\text{C}$	20		
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	75		$^\circ\text{C/W}$
	$R_{\theta JL}$	17		
Operating Junction Temperature	T_J	-55 to +125		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150		$^\circ\text{C}$

Note: 1. Pulse test:300 μ S pulse width,1% duty cycle.2. PCB mounted with 0.2" \times 0.2"(5.0 \times 5.0mm)copper pads.

SS34L THRU SS36L

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 40 to 60 Volts Forward Current - 3.0 Ampere

RATING AND CHARACTERISTIC CURVES SS34L THRU SS36L

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

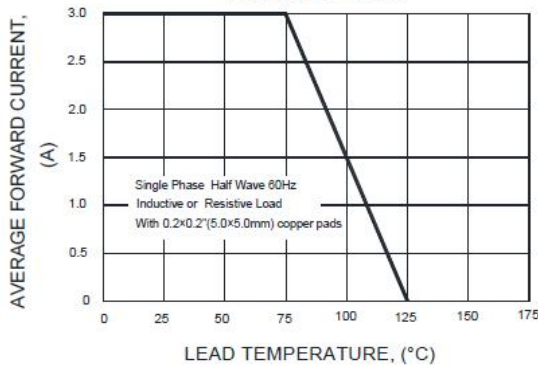


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

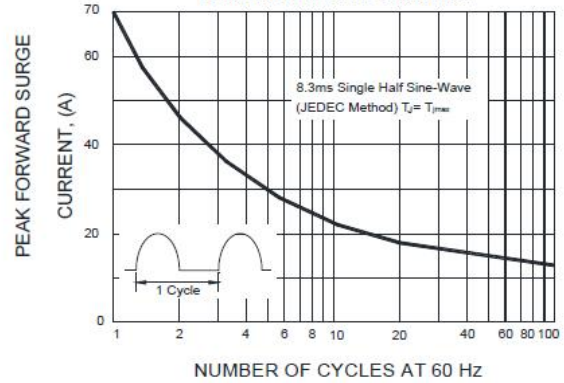


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

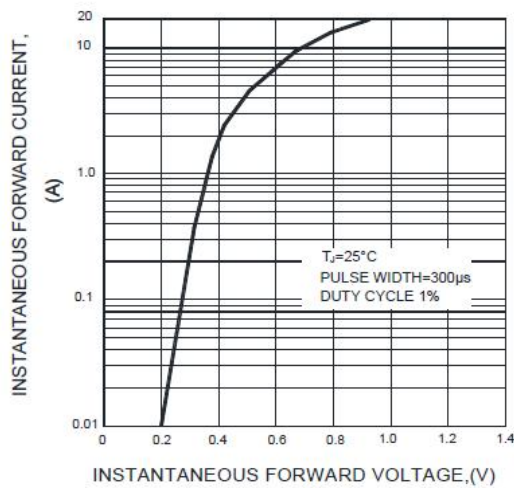


FIG.4-TYPICAL REVERSE CHARACTERISTICS


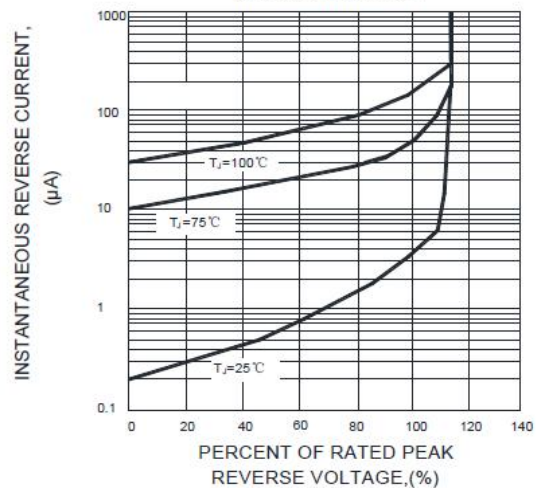


FIG.5-TYPICAL JUNCTION CAPACITANCE

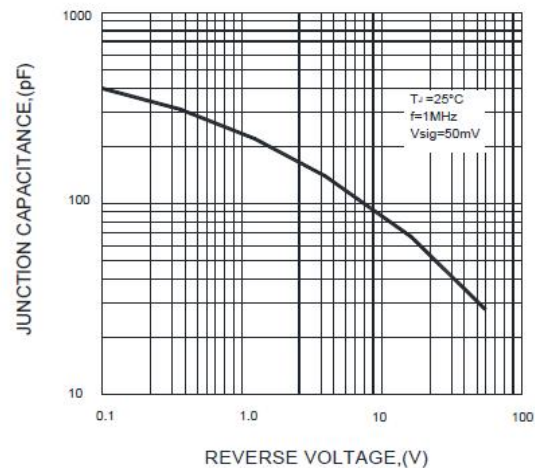

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.