


TACT SWITCH

Suntan®

TSS-RP-06XG

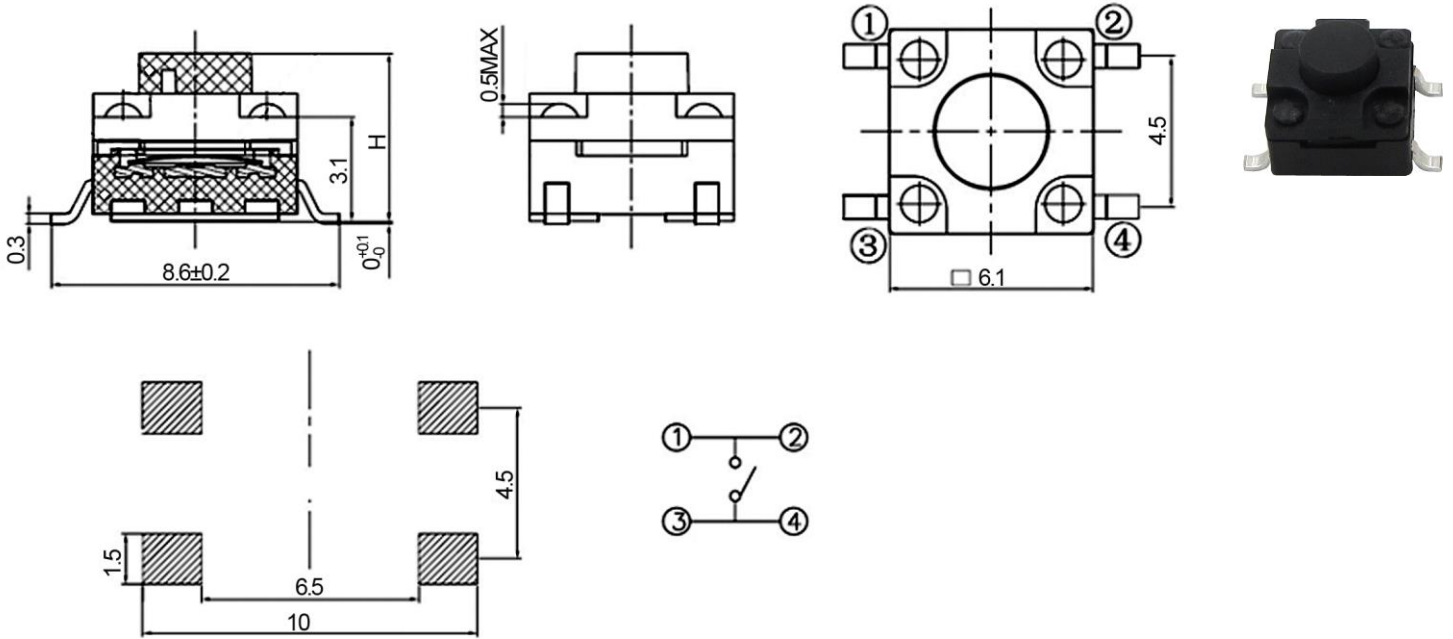

General Tolerance: $\pm 0.2\text{mm}$

| MODEL NO | H (mm) | Tape & Reel Option |
|-------------|--------|--------------------|
| TSS-RP-06XG | 4.3 | Yes |
| TSS-RP-06XA | 5 | Yes |
| TSS-RP-06XB | 7 | Yes |
| TSS-RP-06XE | 9.5 | Yes |

| CODE | OPERATING FORCE(gf) |
|------|---------------------|
| X | 160 \pm 50 |
| Z | 250 \pm 100 |

SPECIFICATIONS

1. RATING:DC 12V 50mA
2. TRAVEL:0.30 \pm 0.1mm
3. CONTACT RESISTANCE 100m Ω MAX
4. LIFE: normal 50,000~100,000 times
(over 100,000 times on request)

Note: Specification are subject to change without notice. For more detail and update, please visit our website.