


# TACT SWITCH

Suntan®

## TSS-TD-4420

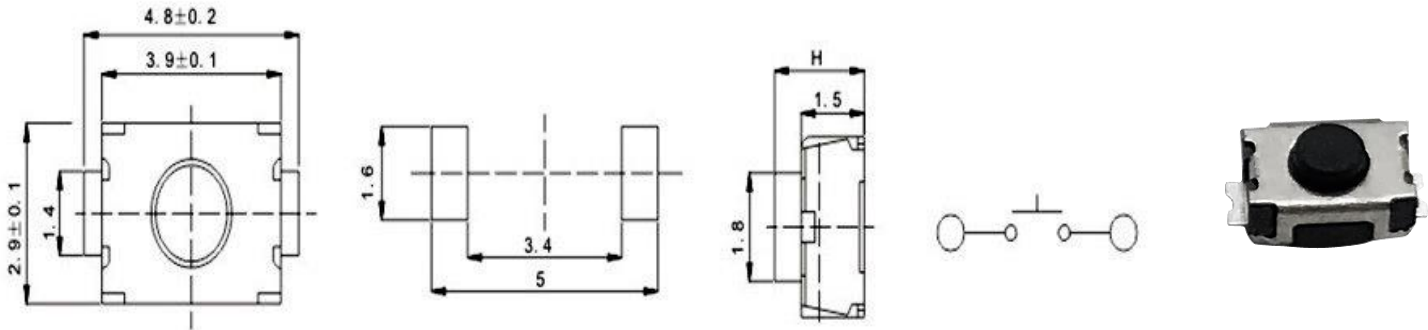

General Tolerance:  $\pm 0.2\text{mm}$

| MODEL NO    | H (mm) | Tape & Reel Option | CODE | OPERATING FORCE (gf) |
|-------------|--------|--------------------|------|----------------------|
| TSS-TD-4420 | 2.0    | Yes                | X    | 160 $\pm$ 50         |
| TSS-TD-4425 | 2.5    | Yes                | B    | 260 $\pm$ 50         |

## SPECIFICATIONS

1. RATING: DC 12V / 50mA
2. TRAVEL: 0.15 $\pm$ 0.05mm
3. CONTACT RESISTANCE:  $\leq 50\text{m}\Omega$
4. LIFE: More than 100,000 times
5. INSULATION RESISTANCE:  $\geq 100\text{M}\Omega$
6. VOLTAGE PROOF: 250V AC / 1min

Note: Specification are subject to change without notice. For more detail and update, please visit our website.