


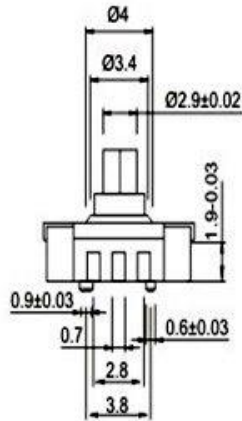


TACT SWITCH

TSS-TD-7760

Suntan®

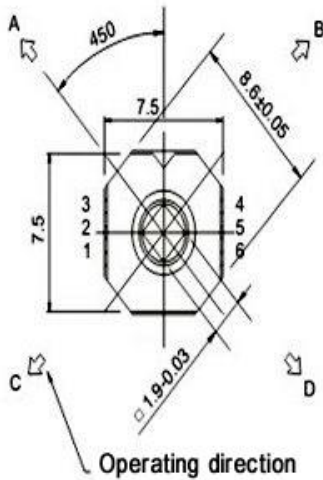

General Tolerance: $\pm 0.2\text{mm}$

MODEL NO	H (mm)	Tape & Reel Option	CODE	OPERATING FORCE (gf)
TSS-TD-7760	6.0	Yes	G	360 \pm 50

SPECIFICATIONS

1. RATING: DC 12V / 50mA
2. TRAVEL: 0.15 \pm 0.1mm
3. CONTACT RESISTANCE: $\leq 50\text{m}\Omega$
4. LIFE: More than 100,000 times
5. INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
6. VOLTAGE PROOF: 250V AC / 1min

Note: Specification are subject to change without notice. For more detail and update, please visit our website.